

# MAGNETS FOR THE WELDING INDUSTRY




## MAGNETIC WELDING SQUARES

### Features

- Ideal for welders that need fast set-up and accurate holding of steel sheet stock, plate and tubing
- Copper-plated square: Weld Spatter, Reduces Scratching
- WS420, WS810 & WS820 models feature "Breakaway Handle"™\*
- Weld spatter resistant covers on certain models\*\*

Max Hold - lbs (kg)	Description	Thick. (in)	Ht. (in)	Wd. (in)	Wt. (lbs)	Zinc Model No.	Copper Model No.
55 (24.95)	Multi-Angle, 10 Angles	3/4	3	4-3/8	1.00	WS11094	-
110 (49.89)	Multi-Angle, Extra Power	1-9/16	3	4-3/8	2.00	WS11094X2	-
40 (18.14)	Inside 90°, Outside 45°/90°	9/16	2-3/4	4-3/4	0.65	WS100	-
60 (27.21)	Compact	3/4	3-3/4	3-3/4	1.00	WS300	WS300CP
60 (27.21)	Compact Multi-Angle	3/4	3-3/4	3-3/4	1.00	WS301	WS301CP
120 (54.43)	Adjustable	1-3/8	3-3/4	7-5/8	2.25	WS302	-
75 (34.02)	Mid-Size	3/4	4-3/8	3-3/4	1.05	WS400	WS400CP
75 (34.02)	Mid-Size, Covered**	3/4	4-3/8	3-3/4	1.15	WS410	WS410CP
150 (68.04)	Mid-Size, Extra Power Covered**	1-1/2	4-3/8	3-3/4	2.30	WS420*	-
160 (72.58)	Large, Covered**	3/4	8	8	3.90	WS810*	-
325 (147.42)	Large, Extra Power Covered**	1-1/2	8	8	7.50	WS820*	-

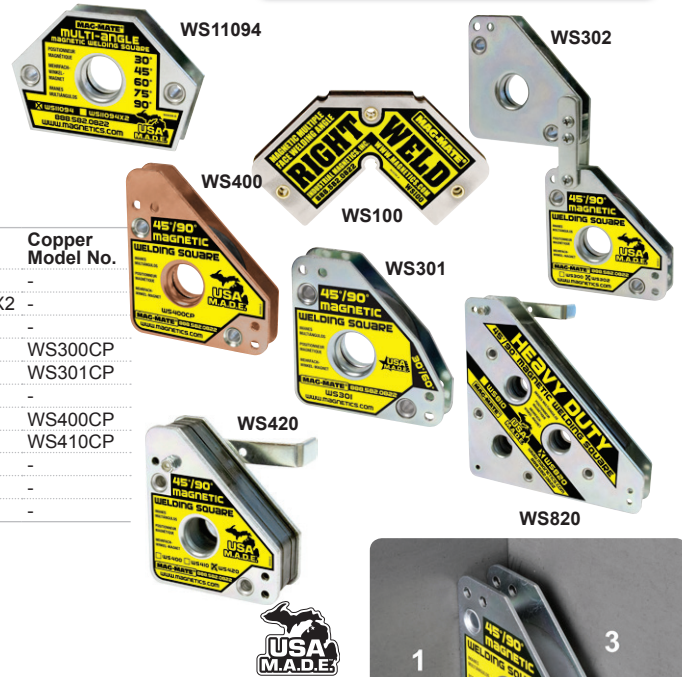

### Magnetic Welding 3-Axis Holding


- Permanent Welding Square holds 3 pieces of metal at once
- Ideal for holding support brackets, gussets, etc.
- Third side has 42lb max hold
- WS410AX3 has weld splatter, fuzz iron resistant cover

Max Hold - lbs (kg)	Description	Thick. (in)	Ht. (in)	Wd. (in)	Wt. (lbs)	Model No.
55 (24.95)	Multi-Angle	1-1/8	3	4-3/8	1.00	WS11094AX3
60 (27.21)	Compact	1-1/8	3-3/4	3-3/4	1.00	WS300AX3
60 (20.21)	Compact Multi-Angle	1-1/8	3-3/4	3-3/4	1.00	WS301AX3
75 (34.02)	Mid-Size	1-1/8	4-3/8	3-3/4	1.05	WS400AX3
75 (34.02)	Mid-size Covered	1-1/8	4-3/8	3-3/4	1.20	WS410AX3



## MAG90™ ON/OFF MAGNETIC SQUARES

On/Off Permanent Rare Earth Magnetic Squares are extremely powerful and eliminate the need for tedious clamping. The Mag90™ squares offer fast work-holding on multiple sides for flat or round steel. Features pre-tapped holes on all sides for mounting and a locking On/Off handle for safety.

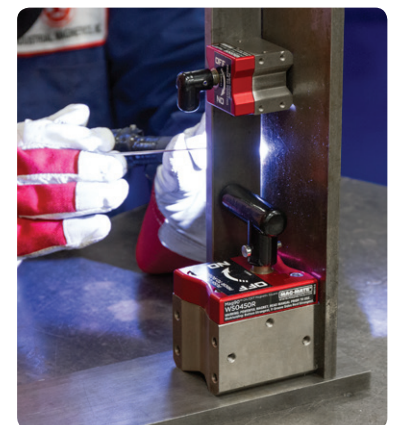

Flat Steel	Max Hold - lbs (kg)		Overall Ht. (in)	Ht. (in)	Wd. (in)	Ln. (in)	Tap	Tap Depth (in)	Wt. (lbs)	Model No.
	Round Steel	Min Dia. (in)								
150 (68.04)	75 (34.02)	1-1/2	2-3/4	1-1/8	1-1/2	1-1/2	#8-20	0.330	0.80	WS0150R
450 (204.12)	225 (102.06)	2	4-5/8	2-3/4	2-1/2	3	1/4-20	0.500	4.30	WS0450R
1000 (453.60)	500 (226.79)	4	4-3/4	3	4	4-1/4	3/8-16	0.625	10.45	WS1000R



## INDUSTRIAL MAGNETICS, INC.

1385 S M 75 • Boyne City, MI 49712

P: 888.582.0822 • F: 231.582.2704 • WWW.MAGNETICS.COM

MGWeldNew (08/19)

Call For the Mag-Mate® Catalog For Information On These Products & More

## MAGNETIC WELDING ANGLES

On/Off Rare Permanent Earth Magnetic Welding Angles welders set up, weld and quickly move on to the next project. Simply place it on a work surface, turn it on and start welding. On/Off magnets easily allows debris to fall away. Can be used on flat or round steel or cast iron. Non-marring hold.


**WSF275X3** - 90° magnetic welding angle, cast aluminum housing with comfort handle. Holds on 3 sides.

**WSP0150R** - Pivoting Magnetic Welding Angle pivot to angles ranging from 22° to 270°, with locking handle and detents. Stainless steel frame. Hold on 3 sides.

**WSF0450R** - 90° Magnetic Welding Angles have slots allowing for quick-slide adjustment or addition of more magnetic bases. Reversible for inside or outside hold. Stainless steel frame.




WSF275X3

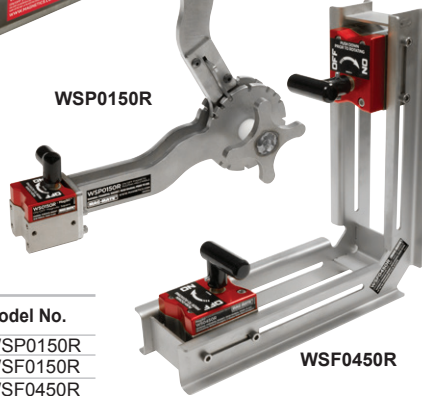

WSP0150R

WSF0450R



Max Hold - lbs (kg)	Angle Type	Height (in)	Width (in)	Length (in)	Weight (lbs)	Model No.
150 (68.04)	Pivoting	9-5/8	2-1/8	9-5/8	4.30	WSP0150R
150 (68.04)	90°	8-1/4	2-7/8	8-1/4	3.60	WSF0150R
450 (204.12)	90°	12-1/4	3-7/8	12-1/4	6.80	WSF0450R
275 (124.74)	90°	7-1/4	1-5/8	7-1/4	5.00	WSF275X3

## ON/OFF MAGNETIC WELDING GROUNDS

On/Off Permanent Rare Earth Magnetic Grounds let welders set up, weld and quickly move on to the next project. Simply place it on a work surface, turn it on and start welding. Makes welding quicker and easier than ever before. Will work on flat or pipe.

Bolt: 1/2-13 x 1-1/4" Lg



Max Hold - lbs (kg)	Ht. (in)	Wd. (in)	Ln. (in)	Amps	Wt. (lbs)	Model No.
150 (68.04)	2-3/4	1-13/16	2-7/8	200	0.90	WG200R
150 (68.04)	2-3/4	1-15/16	2-7/8	300	0.95	WG300R
450 (204.12)	4-5/8	3	5	800	4.90	WG800R

## ON/OFF MAGNETIC WELDING SQUARES

On/Off Permanent Rare Earth Magnetic welding squares are ideal for welders that need fast set-up, accurate holding and precise placement of steel sheet stock, plate and tubing.

### Features

- 5 common angles: 45, 75, 90, 105 & 135 degrees
- WSM0150RG is a dual purpose tool, utilizing multi-angle weld square and a 300 AMP welding ground all in one. Fits 1/2 inch bolt.
- Stays clean and chips fall off easily when magnet is turned off
- Heat resistant up to 180°F (82°C)



WSM0150RG

WSM0150R

## MAGNETIC WELDING GROUNDS



### Features

- Powerful magnet attaches securely to steel work surfaces
- Spring loaded 1/2" dia. stud assures constant electrical ground contact
- Stud rotates 360°
- Release handle
- Holds 35 Lbs.





Max Hold- lbs (kg)	Ht. (in)	Wd. (in)	Ln. (in)	Wt. (lbs)	Model No.
80 (36.28)	3-1/2	1-15/16	3-1/2	1.45	WSM0150R
150 (68.04)	3-3/4	1-15/16	4	1.60	WSM0150RG

Hold - lbs (kg)	Dia. (in)	Ht. (in)	Amps	Stud	Wt. (lbs)	Model No.
35 (15.88)	3-1/2	2-1/4	250	Brass	1.50	WG250
35 (15.88)	3-1/2	2-1/4	800	Copper	1.50	WG800

## WELD TORCH HOLDERS

### Features

- Securely and neatly hold welding torch in place on the top, side or underside of work bench or nearby steel structure
- Keep torch handy and accessible
- Stainless steel holder, plated steel magnetic base
- Magnetic base allows for quick and easy placement and repositioning

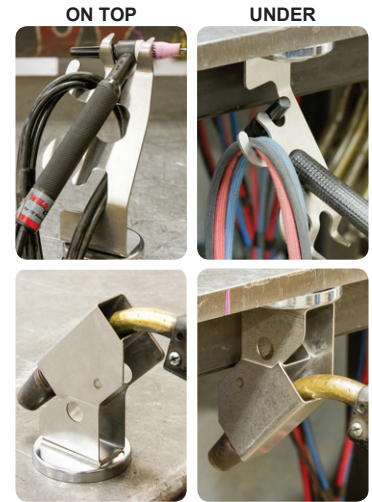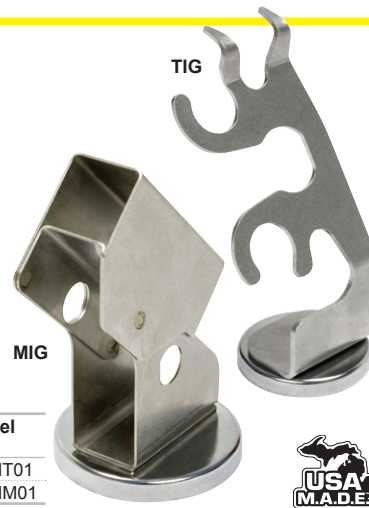

Hold - lbs (kg)	Magnet Dia. (in)	Torch Type	Ht. (in)	Wd. (in)	Wt. (lbs)	Model No.
41 (18.59)	2.63	TIG	6-3/4	3-1/8	0.75	WTHHT01
47.5 (21.54)	3.18	MIG	5-3/4	4	0.90	WTHM01

## AIR TOOL HOLDER



Keep all your air tools organized, neat and handy with this one-piece sturdy rack. Available in three different lengths with slots for 1/4" or 3/8" air tool male couplers.



### Features

- Sturdy all Stainless Steel construction
- Versatile mounting flange
- Beveled flange to keep tools from vibrating off
- Wide shelf for storage of other tools such as sockets




Coupler Size	Height (in)	Width (in)	Projects (in)	Number of Slots-Holes	Weight (lbs)	Model No.
1/4	1-1/2	12	4	5-4	1.75	ATH12-025
3/8	1-1/2	12	4	5-4	1.75	ATH12-038
1/4	1-1/2	24	4	11-10	3.50	ATH24-025
3/8	1-1/2	24	4	11-10	3.50	ATH24-038
1/4	1-1/2	48	4	15-14	7.00	ATH48-025
3/8	1-1/2	48	4	15-14	7.00	ATH48-038

## MAGNETIC WELDING WIND BLOCK

### Features

- Powerful permanent magnets
- Prevents loss of gas coverage
- Stainless steel with flat black finish
- Reduces arc flash
- Spring load holds tight to surface, horizontally, vertically or inverted

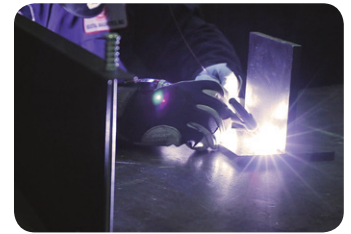

Hold - lbs (kg)	Overall Ht. (in)	Ht. (in)	Wd. (in)	Ln. (in)	Wt. (lbs)	Model No.
50 (22.68)	8.33	7.09	2.88	24	2.50	WWB24
50 (22.68)	8.33	7.09	2.88	36	3.00	WWB36

## ON/OFF MAGNETIC MAG-PRY™



Strong, easy to use, On/Off magnetic pry bar for material leveling and alignment also known as mismatch or high / low allowing for rapid and easy plate matching for seamless welds. Perfect for all plate and seam work, under foot, on vertical surfaces, even overhead. The Mag-Pry™ eliminates need for welded tabs by incorporating a non-marring, On/Off Rare Earth Magnet with 1,000 lbs breakaway force and locking T-handle for safety. Up to 100 times faster than traditional methods saving you time and money, pays for itself in days. No electricity needed.




Ht. (in)	Wd. (in)	Ln. (in)	Wt. (lbs)	Model No.
3-1/2	5-7/8	19	10.0	PB1000R

# KANT-TWIST® CLAMPS



## Features

- Will not "walk-off-center"
- Eliminates distorting and twisting action of C-clamps
- Cantilever design provides 4:1 clamp ratio
- Three different gripping surfaces
- Built-in "V" block for round stock
- Free floating jaws adjust to uneven surfaces
- Copper plated jaws, screw and handle are ideal for welding

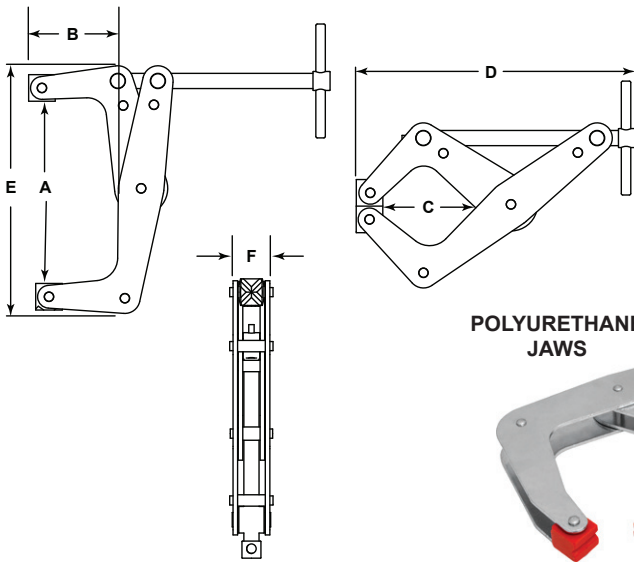

STANDARD T-HANDLE



ROUND HANDLE




DEEP REACH W/ WEAVER-GRIP™



STAINLESS STEEL



POLYURETHANE JAWS



NO-MAR® ROUND FLAT PAD



3 POINT HOLD







Jaw Capacity A (in)	Throat Depth Open B (in)	Throat Depth Closed C (in)	Overall Length D (in)	Width Open E (in)	Thickness F (in)	Max Clamp Force (lbs)	Handle Diameter & Length (in)	Handle Dia & Length w/Weaver-Grip™ (in)	Weight (lbs)	Model No.	Model No. With Weaver-Grip™
<b>Round Handle. Ideal for "fine tuning" clamping force</b>											
3/4	3/8	3/8	1-3/4	1-3/8	7/16	200	5/8	N/A	0.06	K007R	N/A
1	1/2	1/2	2-1/4	1-7/8	1/2	350	3/4	N/A	0.1	K010R	N/A
1-1/2	1	1	3-3/4	3-1/8	5/8	600	1-1/8	N/A	0.29	K015R	N/A
2	1-1/4	1-1/4	4	3-1/4	7/8	800	1-1/8	N/A	0.46	K020R	N/A
2-1/2	1-3/4	1-13/16	4-1/2	4-1/16	7/8	700	1-1/8	N/A	0.51	K025RD	N/A
<b>Standard T-Handle</b>											
1	1/2	1/2	2-1/8	1-7/8	1/2	350	1/8 x 1	1/2 x 1-1/2	0.09	K010T	K010TW
2	1-1/4	1-1/4	4	3-3/8	7/8	800	1/8 x 1-3/4	11/16 x 2-1/2	0.42	K020T	K020TW
3	1-3/4	1-1/2	6-1/4	5-1/4	1-1/8	1500	1/4 x 3	7/8 x 4	1.15	K030T	K030TW
6	2-1/8	3	9-1/4	8-1/2	1-3/8	2000	5/16 x 3-3/4	1-1/8 x 5	2.78	K060T	K060TW
9	3-3/4	4-3/4	14-1/2	13	1-5/8	2500	3/8 x 6	N/A	7.15	K090T	N/A
12	5-1/2	6-1/2	17-3/4	16	2	6000	3/8 x 6	N/A	13.9	K120T	N/A
<b>Deep Reach - Extended Reach T-Handle. Reach farther onto material</b>											
2-1/2	1-3/4	1-13/16	4-1/2	4-1/16	7/8	700	1/8 x 1 3/4	11/16 x 2-1/2	.51	K025TD	K025TDW
4-1/2	2-3/8	2-5/8	7-1/2	7	1-1/8	1700	1/4 x 3	7/8 x 4	1.75	K045TD	K045TDW
6	5	5	11-1/2	10	1-3/8	2000	5/16 x 3 3/4	1-1/8 x 5	3.75	K060TD	K060TDW
10	6-1/2	7	17	15	1-3/4	3500	3/8 x 6	N/A	11.35	K100TD	N/A
<b>Stainless Steel T-Handle. Ideal for use in corrosive, sanitary or magnetic applications</b>											
2	1-1/4	1-1/4	4	3-1/4	7/8	700	1/8 x 1-3/4	11/16 x 2-1/2	.42	K020TS	K020TSW
3	1-1/4	1-1/2	6-1/4	5-1/4	1-1/8	1200	1/4 x 3	7/8 x 4	1.14	K030TS	K030TSW
4-1/2	2-3/8	2-1/2	7-1/2	6-3/4	1-1/8	1500	1/4 x 3	7/8 x 4	1.74	K045TSD	K045TSDW
<b>No-Mar® Round Flat Pad Jaw, T-Handle. Wood, plastics, aluminum or polished metals</b>											
1	1/2	1/2	2-1/2	1-3/4	1/2	350	1/8 x 1	1/2 x 1-1/2	0.1	K010TP	K010TPW
2	1-1/8	1-1/4	4-1/2	3-1/4	1-3/8	800	1/8 x 1-3/4	11/16 x 2-1/2	0.46	K020TP	K020TPW
2-1/2	1-3/4	1-13/16	4-1/2	4-1/16	1-3/8	700	1/8 x 1-3/4	11/16 x 2-1/2	.51	K025TPD	K025TPDW
3	1-1/4	1-3/4	6-3/4	5	1-7/8	1500	1/4 x 3	7/8 x 4	1.26	K030TP	K030TPW
4-1/2	2-1/4	2-1/2	8-1/4	6-3/4	1-7/8	1700	1/4 x 3	7/8 x 4	1.87	K045TPD	K045TPDW
<b>Polyurethane Jaws, T-Handle. Ideal for holding polished or finished materials. Jaws are 65 to 75 on Shore Hardness D Scale. (70 D ± 5)</b>											
3	1-1/4	1-3/4	6-3/4	5	1-1/8	1125	1/4 x 3	7/8 x 4	1	K030TU	K030TUW
4-1/2	2-1/4	3-13/16	8-1/4	7	1-1/8	1275	1/4 x 3	7/8 x 4	1.61	K045TUD	K045TUDW
6	4-1/2	5-1/2	11- 1/2	10	1-3/8	1500	5/16 x 3-3/4	1-1/8 x 5	3.58	K060TUD	K060TUDW
<b>Double Spindle T-Handle. 3 point hold, 2 directional pressure like a third hand. Great for welding or gluing</b>											
6	5	5-1/2	11-1/2	10	1-3/8	2000	5/16 x 3-3/4	1-1/8 x 5	4.27	K060TD3	N/A

# KANT-TWIST® QUICK-ACTING CLAMPS



## Features

- Quick Acting Hold Down Clamp
- More clamping power than ordinary Toggle Clamps
- Ideal for Drill Presses and Machining Centers
- Best for holding where thickness and surface are not exact from part to part
- Spring tension jaw moves quickly out of the way
- USA M.A.D.E.™

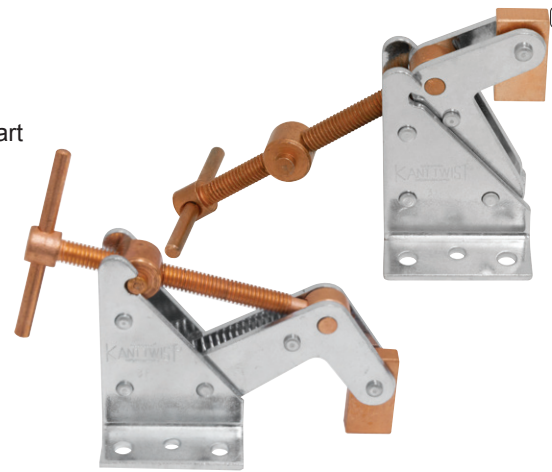







Jaw Opening A (in)	Throat Depth Open B (in)	Height Closed C (in)	Height Open C (in)	Overall Length Open D (in)	Overall Length Closed E (in)	Flange Width F (in)	Flange Thick. G (in)	Bolt Hole Width H (in)	Bolt Hole Length J (in)	Max Clamp Force (lbs)	Handle Diameter & Length (in)	Handle Dia. & Length w/ Weaver-Grip™ (in)	Weight (lbs)	Model No.	Model No. w/ Weaver-Grip™
3	1-1/2	3-1/2	4	6	5-1/2	2-3/4	1/8	2	1-1/2	1500	1/4 x 3	7/8 x 4	1.15	K030TQ	K030TQW
6	3	6	7	9	8-1/2	3-3/16	3/8	3	2-5/8	3200	5/16 x 3-3/4	1-1/8 x 5	3.7	K060TQ	K060TQW

# KANT-TWIST® WELDING GROUND CLAMP



## Features

- Dual-purpose workpiece clamp and welding ground
- Contains a 400 AMP weld ground connection
- No-twist clamp secures workpiece without twisting or “walk-off-center”
- Copper plated spindle and clamp jaws prevent weld spatter from sticking
- Clamp jaws are beveled to hold both flat or round surfaces
- Deep reach jaw allows for deep clamping of material
- USA M.A.D.E.™

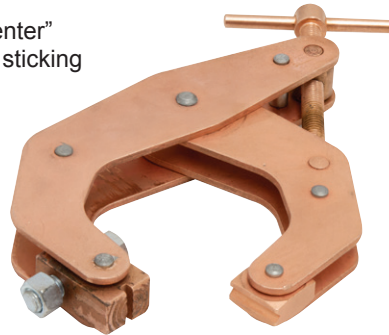

Jaw Capacity A (in)	Throat Depth Open B (in)	Throat Depth Closed C (in)	Overall Length D (in)	Width Open E (in)	Thickness F (in)	Max Clamp Force (lbs)	Handle Diameter & Length (in)	Handle Dia. & Length w/ Weaver Grip (in)	Weight (lbs)	Model No.	Model No. w/ Weaver-Grip™
4-1/2	2-3/8	2-5/8	7-1/2	7	1-1/8	1700	1/4 x 3	7/8 x 4	1.91	K045TGD	K045TGDW

# WEAVER-GRIPS™



## Features

- Weaver-Grip™ - A High Quality Handle Accessory for Kant-Twist® T-Handle Clamps
- Comfortable Grip for ease of use
- Makes repetitive use much easier
- Apply maximum pressure with less effort
- Very durable high quality ABS plastic
- Taps easily On and Off
- USA M.A.D.E.™



Fits Clamps with Jaw Capacity (in)	Fits Clamps with T-Handle Length (in)	Diameter (in)	Length (in)	Weight (lbs)	Model No.
1	1	1/2	1-1/2	0.01	WG010
2	1-3/4	11/16	2-1/2	0.02	WG020
3 & 4-1/2	3	7/8	4	0.05	WG034
6	3-3/4	1-1/8	5	0.15	WG060

## GRINDER TOOL HOLDER



Keep your grinder handy on top or side of steel work benches. Powerful permanent magnet holds up to 6" diameter grinder wheels in horizontal or vertical positions, regardless of trigger location.



### Features

- Sturdy stainless steel holder
- Keep grinder protected and close at hand
- Magnetic base allows for quick placement and repositioning



Hold - lbs (kg)	Height (in)	Width (lbs)	Length (in)	Weight (in)	Model No.
56.0 (25.40)	6	4-3/8	9-1/8	1.20	GTH01

## HOSE CORD HOLDER



### Features

- Secure hoses, cables, cords and more to any flat, steel surface
- Magnet can be quickly installed and repositioned
- Sturdy stainless steel hook
- Small holder secures ends of hose/cord from unravelling



Hold - lbs (kg)	Projects (in)	Magnet Diameter (in)	Hook Base Depth (in)	Hook Tip Length (in)	Hook Width (in)	Weight (lbs)	Model No.
45 (20.41)	4-3/8	2.88	3-3/4	2	1	0.65	MX2750HC1

## CAN/CUP HOLDER



Hold your can, cup, bottle, lubricant spray, etc. where you want it. Take it with you from one machine to another or anywhere there is a metal surface. Holds well on ferrous metal surfaces, painted or plated surfaces.

### Features

- Sturdy Stainless Steel holder
- Holds diameters up to 3-3/8" with or without a handle
- Available with magnets or through holes

#### Magnet Mount

Hold - lbs (kg)	Height (in)	Width (in)	Projects (in)	Weight (lbs)	Model No.
41.0 (18.60)	3.5	4.25	4-1/4	0.85	CCH01
82.0 (37.2)	3.5	8.25	4-1/4	2.10	CCH02
82.0 (37.2)	3.5	12	4-1/4	2.95	CCH03

#### Through Hole Mount

Mounting Hole (in)	Height (in)	Width (in)	Projects (in)	Weight (lbs)	Model No.
0.27	3.5	4.25	4	0.55	CCH11
0.27	3.5	8.25	4	1.40	CCH12
0.27	3.5	12	4	2.25	CCH13



## TOOL STORAGE HOLDING TRAYS



These Tool Storage Holding Trays are used for holding tools, fasteners, spray cans, tape, etc. to the sides of tool boxes, walls, tables or any area where tools need to be within reach. The Magnetic Mount tray allows you to quickly remove the tray from your toolbox and take it wherever your tools are needed. No need to run back and forth to your toolbox. Most standard size tool boxes will hold two, ST0625 trays, side by side.

### Features


- Sturdy one-piece Stainless Steel construction
- Direct Mount or Magnetic Mount option
- Tray depth one inch (1") on all models
- Direct mount models have 2 or 3 thru-holes

#### Magnetic Mount

Hold - lbs (kg)	Length (in)	Width (in)	Height (lbs)	Weight (lbs)	Model No.
20.5 (9.29)	6.25	4.50	2.75	1.25	ST0625M
43.5 (19.73)	11.50	4.50	2.75	2.30	ST1150M
43.5 (19.73)	14.00	4.50	2.75	2.45	ST1400M

#### Through Hole Mount

Mounting Hole - in (mm)	Length (in)	Width (in)	Height (lbs)	Weight (lbs)	Model No.
0.201 (5.11)	6.25	4.50	2.75	0.95	ST0625
0.201 (5.11)	11.50	4.50	2.75	1.70	ST1150
0.201 (5.11)	14.00	4.50	2.75	1.85	ST1400



# NO-MAR® HAMMERS



## NO-MAR® No Bounce Safety Polyurethane Hammer

- True Safety Hammer (No Steel, Non-Sparking)
- High Performance Urethane Head. Shore A70
- Fiberglass Handle with Ergonomic Grip
- Absorbs Recoil Shock

Head Face Dia. (in)	Head Length (in)	Handle Length (in)	OAL (in)	Weight (lbs)	Model No.
1-5/8	2-15/16	9-1/4	11-1/4	0.625	HU162
1-7/8	3-1/8	12-1/2	14-1/2	1	HU187
2-1/16	4	12	14-1/4	1.38	HU206
2-5/8	5-1/8	12-1/2	14-1/4	2	HU262



## NO-MAR® Lead Hammer

- Genuine 4% Antimonial Lead
- Head Secured by Locking Pin
- Designed for NO-RECOIL and NO-MAR Blows with Max Impact
- Vinyl Grip for More Comfort & Less Fatigue
- Conforms to ASME B107.400 - 2018

Head Face Dia. (in)	Head Length (in)	Handle Length (in)	OAL (in)	Weight (lbs)	Model No.
3/4	2-5/8	9	10	1	HL075-01
1-1/8	2-5/8	8-1/2	10	2	HL112-02
1-9/16	3-1/8	8-3/4	10-1/2	3	HL156-03
1-5/8	3-3/4	9	11	5	HL162-05



## NO-MAR® Brass Safety Hammer

- High Purity Brass Head
- Non-Sparking & Non-Magnetic
- Exceptional Long Life Head
- Fiberglass Handle with Ergonomic Grip
- Conforms to ASME B107.400 - 2018

Head Face Dia (in)	Head Length (in)	Handle Length (in)	OAL (in)	Weight (lbs)	Model No.
7/8	1-7/8	11	12	0.5	HB087-00
1	2-5/8	12-1/2	14	1	HB100-01
1-1/4	3-5/8	12-1/2	14	2	HB125-02
1-1/2	3-3/4	12	14	3	HB150-03
1-3/4	4-3/8	12	14	4	HB175-04
1-7/8	3-3/4	12	14	5	HB187-05
2	7	18-1/2	21	10	HB200-10



## NO-MAR® Press-On Tip Hammer

- Designed for Recoilless Blow With Max Impact
- Replaceable Polyurethane Press-On Tips
- Red Tip Shore D45 Durometer, Cream Tip Shore D65 Durometer
- Fiberglass Handle with Ergonomic Grip
- Non-Rusting, Precision Balanced, Machined Steel Head

Head Face Dia. (in)	Head Length (in)	Handle Length (in)	OAL (in)	Weight (oz)	Model No.
5/8	2-1/4	10	10-3/4	3.75	HP062
3/4	2-1/2	10-1/2	11-1/4	4.5	HP075
1	3-1/4	11	12-1/4	8	HP100
1-1/4	3-1/4	11	12-1/2	12	HP125
1-1/2	4	12	14-1/2	20	HP150




## Frugg Dual Purpose Hammer

- Hard Face and Soft Face In One Hammer
- Precision Machined Head for Excellent Balance
- Durable, Replaceable No-Mar® Urethane Shore D45 Durometer Tip
- Steel Head is Heat-Treated
- Brass Head is Non-Sparking Safety Hammer
- Conforms to ASME B107.400 - 2018

Head Type	Head Dia. (in)	Head Length (in)	Handle Length (in)	OAL (in)	Weight (lbs)	Model No.
Steel	1-1/4	4 1/4	11	12-1/4	1.15	HF125US
Brass	1-1/4	4 1/4	11	12-1/4	1.2	HF125UB



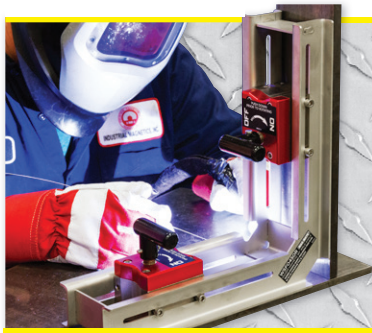

# MAGNETS FOR THE WELDING INDUSTRY



## LIFT MAGNETS

### PowerLift® Magnets

These compact yet powerful Rare Earth lift magnets can be used on flat or round surfaces and contain an internal release ON/OFF device that does not contact or damage the surface of the part being lifted. 3:1 Design Factor

### VersaLift™ Magnets

Compact and powerful Rare Earth permanent lift magnet for use on flat or round surfaces. Contains an internal On/Off release device that does not contact or damage the surface of the part. More features than other lifts and manufactured in the USA (USA M.A.D.E.™). 3:1 Design Factor

### DYNAMICLift™ Magnets

These lightweight and powerful Rare Earth permanent lift magnets can be used on flat or round surfaces and contain an internal release On/Off device that does not contact or damage the surface of the part being lifted. DynamicLifts™ have superior holding on thin gauge ferrous metals. 3:1 Design Factor

### Creative Lift® Magnets

Permanent ceramic lift magnets are ideal for handling flat steel plates, die castings, forgings, etc. They eliminate the need for clamping devices, slings or chains. Patented, non-marring roller cam release. 3:1 Design Factor

### BASICLift™ Magnets

Permanent ceramic lift magnet for a broad range of lifting applications. The Basic Lift magnet has a full width cam release and a tall lift lug for easy use with crane hooks and sling.



## SHEET HANDLERS

Lift or move sheets, plates, hot or oily parts. Works perfect for burn tables, storage racks and transferring sheets from one process to another in a vertical or horizontal position. Protects workers from nicks, cuts, burns and slivers. No power required.



## CUTTING TABLE TOOLS

Cutting table magnets are perfect for retrieving those hot or oily parts with speed and precision. Find the exact tool you are looking for to move those steel parts with a number of products in all shapes and sizes.



## WELD-ON PADEYES

Engineered and certified to meet all ASME BTH-1 categories and classes. Eliminate the need and time to engineer, fabricate, machine and certify lifting padeyes. By purchasing these one-of-a-kind padeyes, you can have them on the shelf ready to weld and speed up delivery, testing and approval of your projects.

### FEATURES

- Hole is reamed to fit shackle pin/bolt ± 0.01"
- A36 Weldable Carbon Steel
- Weld Spec and Weld Line on Padeye
- Date Coded
- Engineered and Certified



## RETRIEVERS

Our magnetic retrievers are perfect for picking up those out of reach products in bins, boxes, kegs, tables and liquid tanks as well as smaller, ferrous metal pieces such as nuts, bolts, nails and more.

