



### LIFTING MAGNETS

## POWERARM™ - VEHICLE MOUNTED

The Manhole PowerArm™ makes lifting and replacing manhole covers the most ergonomic. Great for repetitive access like survey/cleaning crews. Electric Hoist: drive within 3 feet of the center of the lid and let the "Arm" adjust to your location. This "Arm" has a 3-foot, 180° swing radius that allows the positioning of the magnet to the center of the manhole cover. Manual Hoist: Use backup camera to get as close to center as possible. Both "Arms" have 400 lbs. lifting capacity, fit into a standard 2" square receiver hitch and are constructed of welded tubular steel. (Rare Earth Magnet sold separately). Use PowerArm™ to lower items such as camera tractors, large sewer nozzles, pipe plugs, etc.



### ELECTRIC HOIST SPECIFICATIONS:


55 AMP, 12 VDC with power-up & power-down control, removable 16' remote control cord and a 20' galvanized cable with latch hook  
 Provided with a 2-Pole DC power connector, heavy-gauge 13' long lead to connect hoist to vehicle battery (+) positive terminal and 6' long ground cable to connect to vehicle frame

### MANUAL HOIST SPECIFICATIONS:


Worm Gear hoist that will hold load when handle is released  
 Polyester strap with Zinc-plated hook & safety latch  
 Remove hoist, insert sideways for tailgate access, storage, and travel

WINCH TYPE	A (IN)	B (IN)	C (IN)	WEIGHT (LBS)	MODEL NO.
Electric	56-3/8	17-13/16	7-1/4	87	MCLPAE2000
Manual	30-7/8	20-1/2	20-13/16	30	MCLPAM1000

ELECTRIC POWERARM

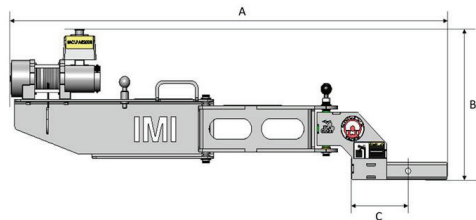

MANUAL POWERARM



TOLL FREE **1.800.662.4638** [imi@magnetics.com](mailto:imi@magnetics.com)